

**Reticle
Catalogue**

Digital Night Vision Riflescopes

DIGEX

N450 | N455

Non-scalable reticles

The values of the non-scalable reticles are correct in the following cases:

- when the magnification of the scope is set to minimum
- when "picture in picture" is activated

D50i

C50i

X54i

H50i

X50i

T54i

M58i

Scalable reticles

Reticle parameters apply to all magnifications

X51Fi-300

M56Fi (Mil-Dot)

M57Fi (Mil-Dot)


Digital Night Vision Riflescopes

DIGEX N450 | N455



D50i

Reticle parameters (for 4x magnification)





	MOA	cm @ 100 m
Section A	2.6	7.4
Section B	2.6	7.4
Section C	0.4	1.1

Digital Night Vision Riflescopes

DIGEX N450 | N455

C50i

Reticle parameters (for 4x magnification)

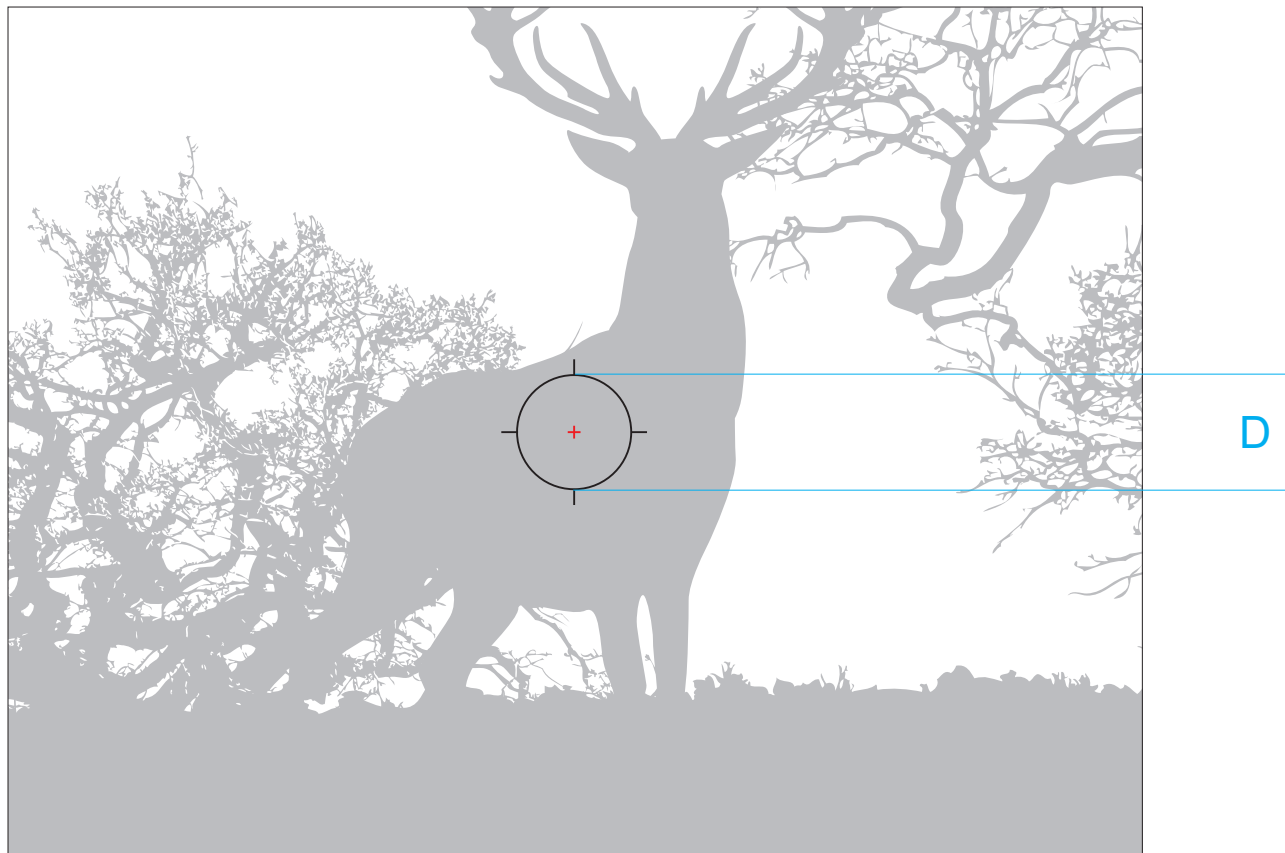



	MOA	cm @ 100 m
Section A	2.6	7.4
Section B	2.6	7.4
Section C	0.4	1.1
Section D	34.4	100

Digital Night Vision Riflescopes

DIGEX N450 | N455

X54i

Reticle parameters (for 4x magnification)

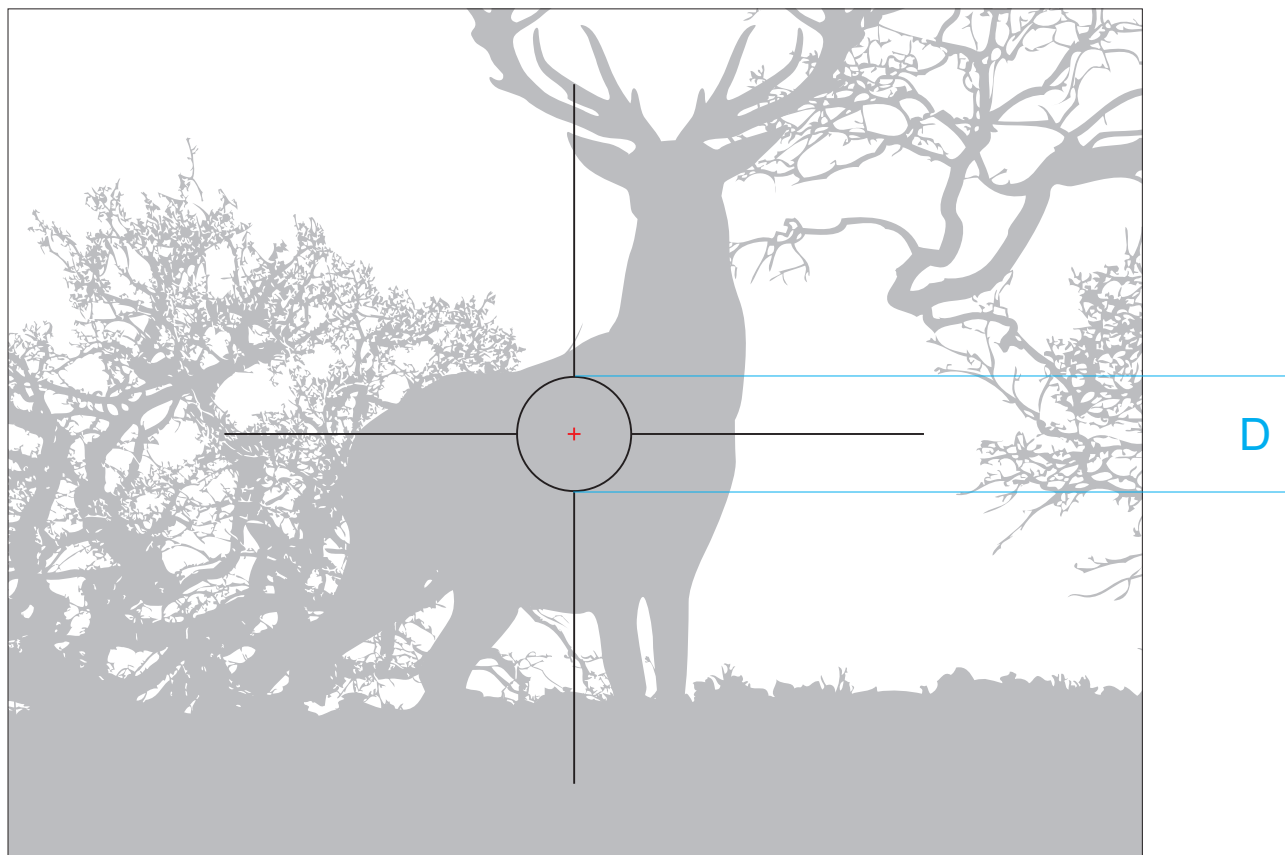


	MOA	cm @ 100 m
Section A	2.6	7.4
Section B	2.6	7.4
Section C	0.4	1.1
Section D	34.4	100


Digital Night Vision Riflescopes

DIGEX N450 | N455

H50i

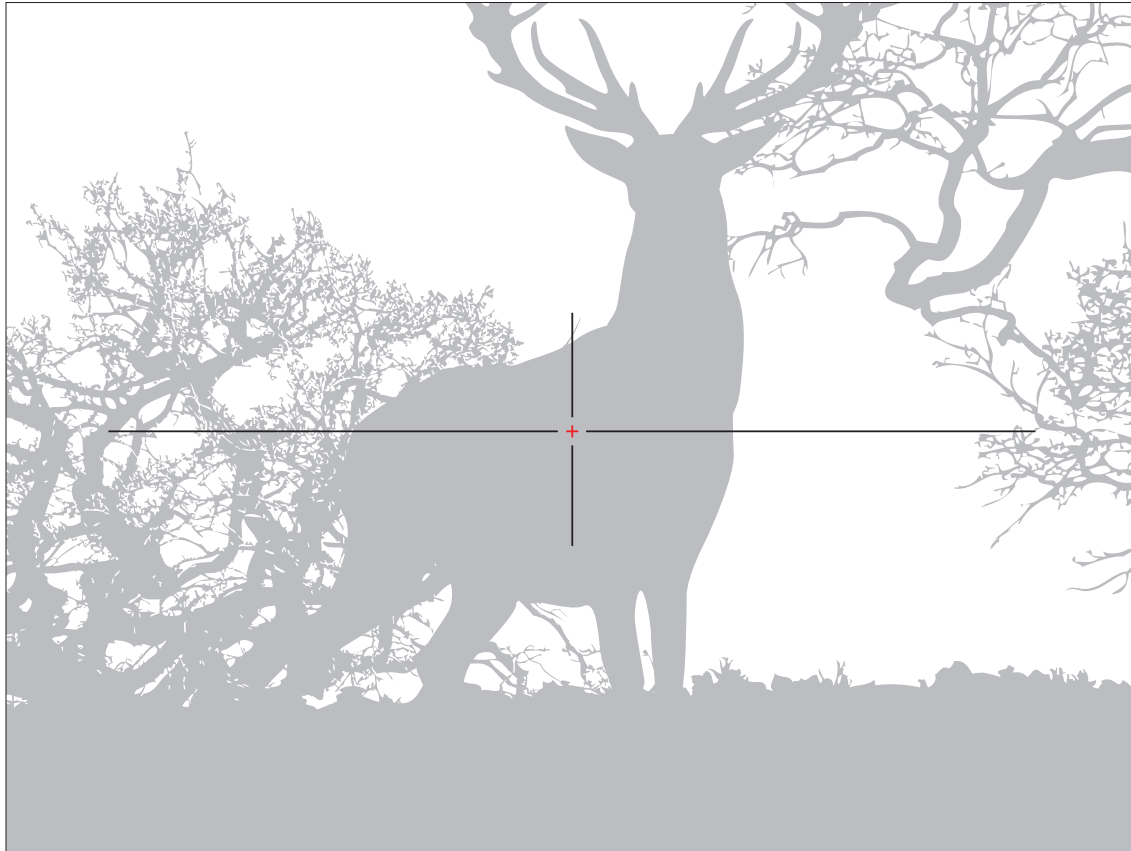

Reticle parameters (for 4x magnification)

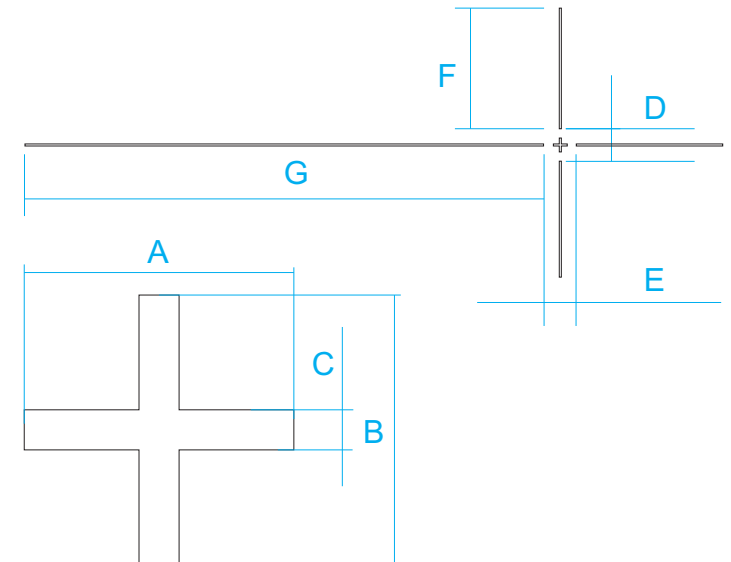

	MOA	cm @ 100 m
Section A	2.6	7.4
Section B	2.6	7.4
Section C	0.4	1.1
Section D	10	29
Section E	10	29
Section F	32	93
Section G	115	334


Digital Night Vision Riflescopes

DIGEX N450 | N455

X50i



Reticle parameters (for 4x magnification)

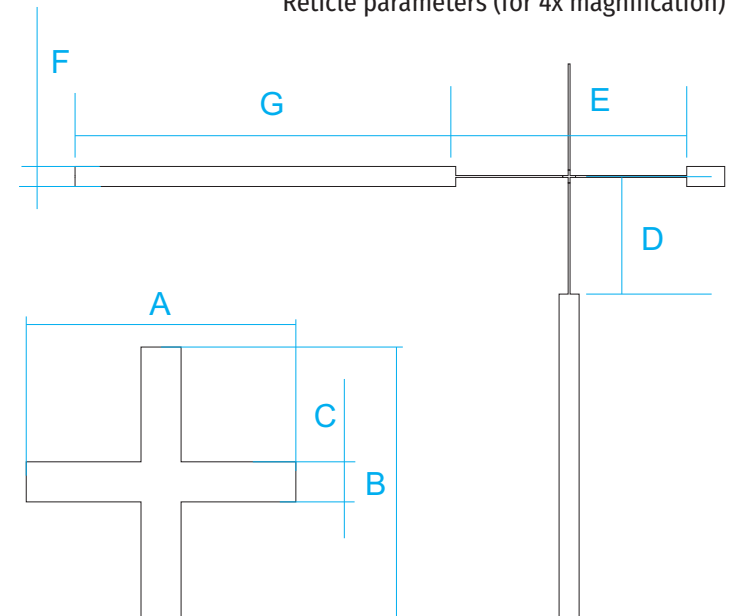

	MOA	cm @ 100 m
Section A	2.6	7.4
Section B	2.6	7.4
Section C	0.4	1.1
Section D	17,2	50
Section E	34,4	100
Section F	1.1	3.3
Section G	90	262


Digital Night Vision Riflescopes

DIGEX N450 | N455

T54i



Reticle parameters (for 4x magnification)

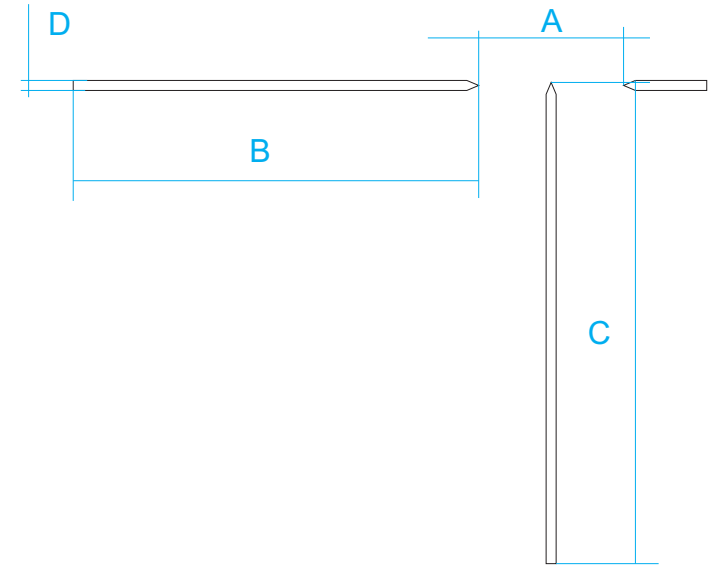


	MOA	cm @ 100 m
Section A	34.4	100
Section B	97.5	284
Section C	116	338
Section D	2.6	7.4

Digital Night Vision Riflescopes


DIGEX N450 | N455

M58i

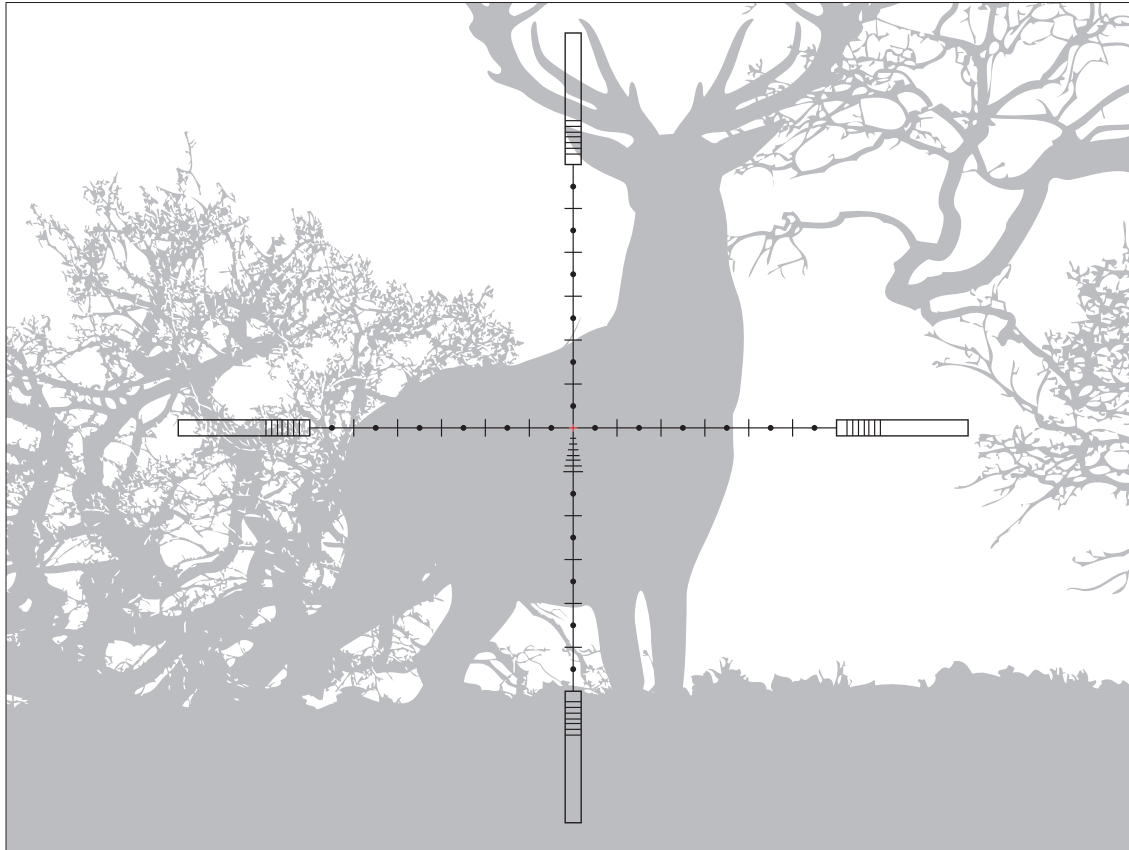

Digital Night Vision Riflescopes

DIGEX N450 | N455

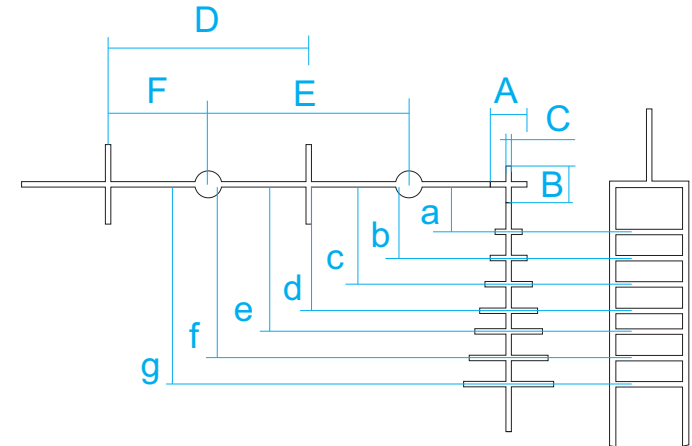

	MOA	cm @ 100 m
Section A	2.6	7.4 on minimal magnification
Section B	2.6	7.4 on minimal magnification
Section C	0.4	1.1 on minimal magnification
Section D	3.5	10 (1 mil) on 16x magnification
Section E	3.5	10 (1 mil) on 16x magnification
Section F	3.5	10 (1 mil) on 8x magnification

Section a: 1 mil (10 cm @ 100 m) on 4x magnification

Section b: 1 mil (10 cm @ 100 m) on 6x magnification

Section c: 1 mil (10 cm @ 100 m) on 8x magnification

Section d: 1 mil (10 cm @ 100 m) on 10x magnification


Section e: 1 mil (10 cm @ 100 m) on 12x magnification

Section f: 1 mil (10 cm @ 100 m) on 14x magnification


Section g: 1 mil (10 cm @ 100 m) on 16x magnification

SCALABLE

X51Fi-300

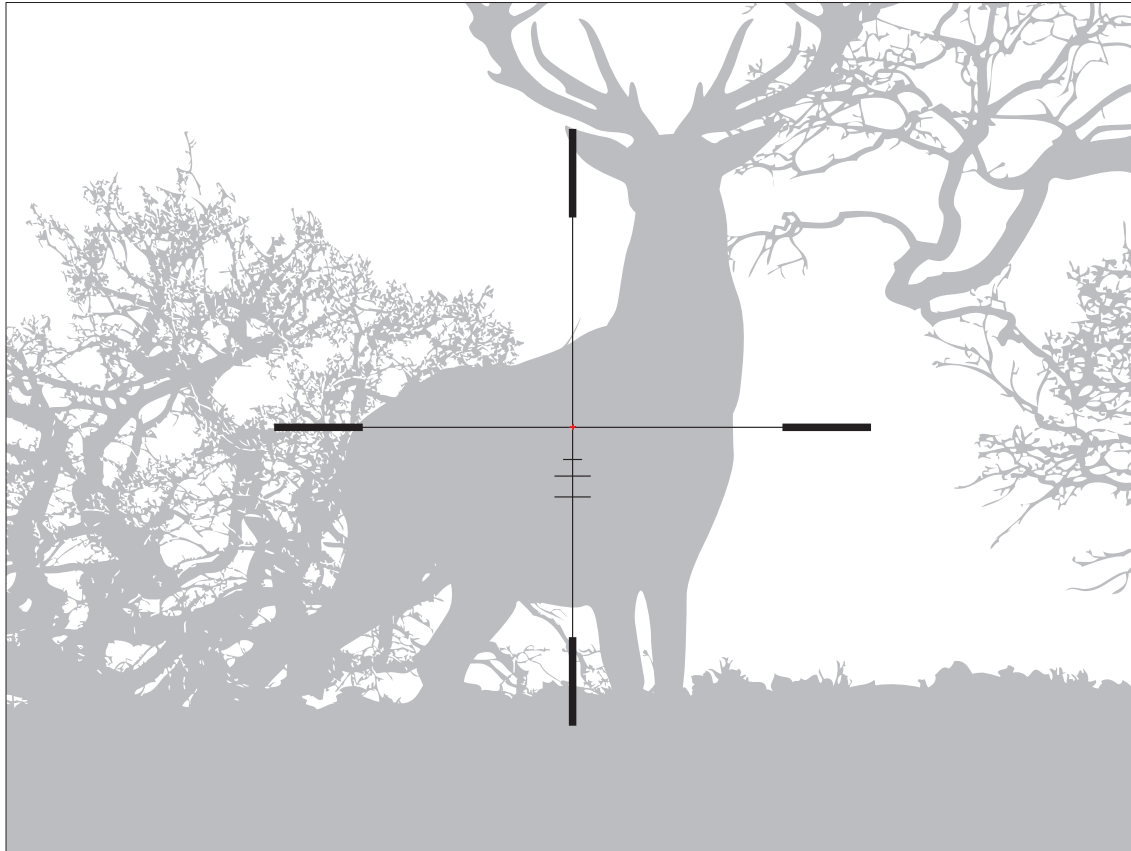

Reticle parameters (apply to all magnifications)

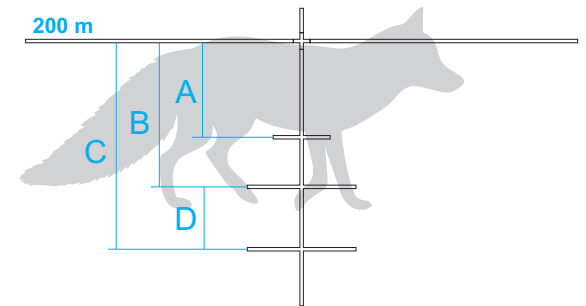


	200 m	300 m
Section A	15 cm (fox body)	23 cm (roe deer body)
Section B	23 cm (roe deer body)	35 cm (wild boar body)
Section C	35 cm (wild boar body)	50 cm (deer body)
Section D	—	15 cm (fox body)

Digital Night Vision Riflescopes


DIGEX N450 | N455

SCALABLE

M56Fi

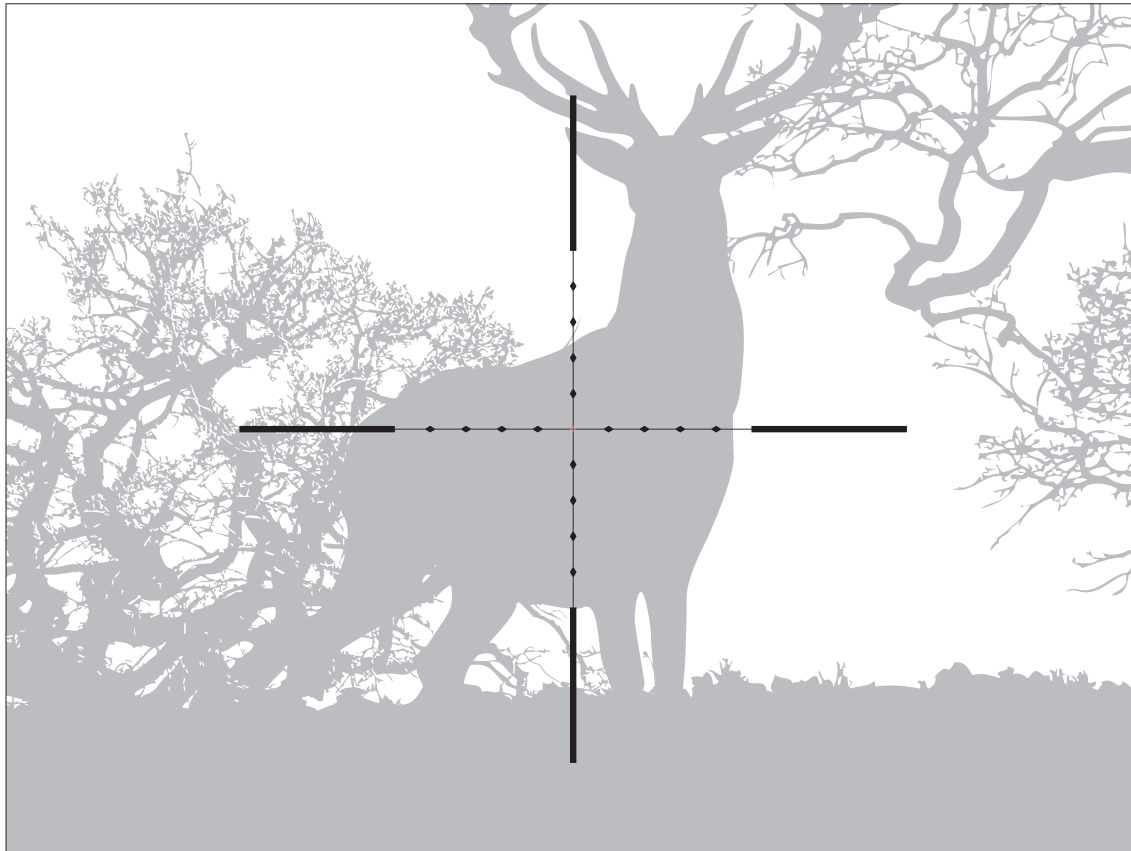

Reticle parameters (apply to all magnifications)

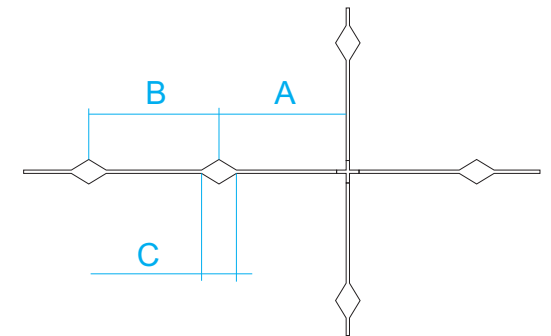


	MOA	cm @ 100 m
Section A	3.5	10 (1 mil)
Section B	3.5	10 (1 mil)
Section C	0.86	2.5 (0.25 mil)

Digital Night Vision Riflescopes


DIGEX N450 | N455

SCALABLE

M57Fi

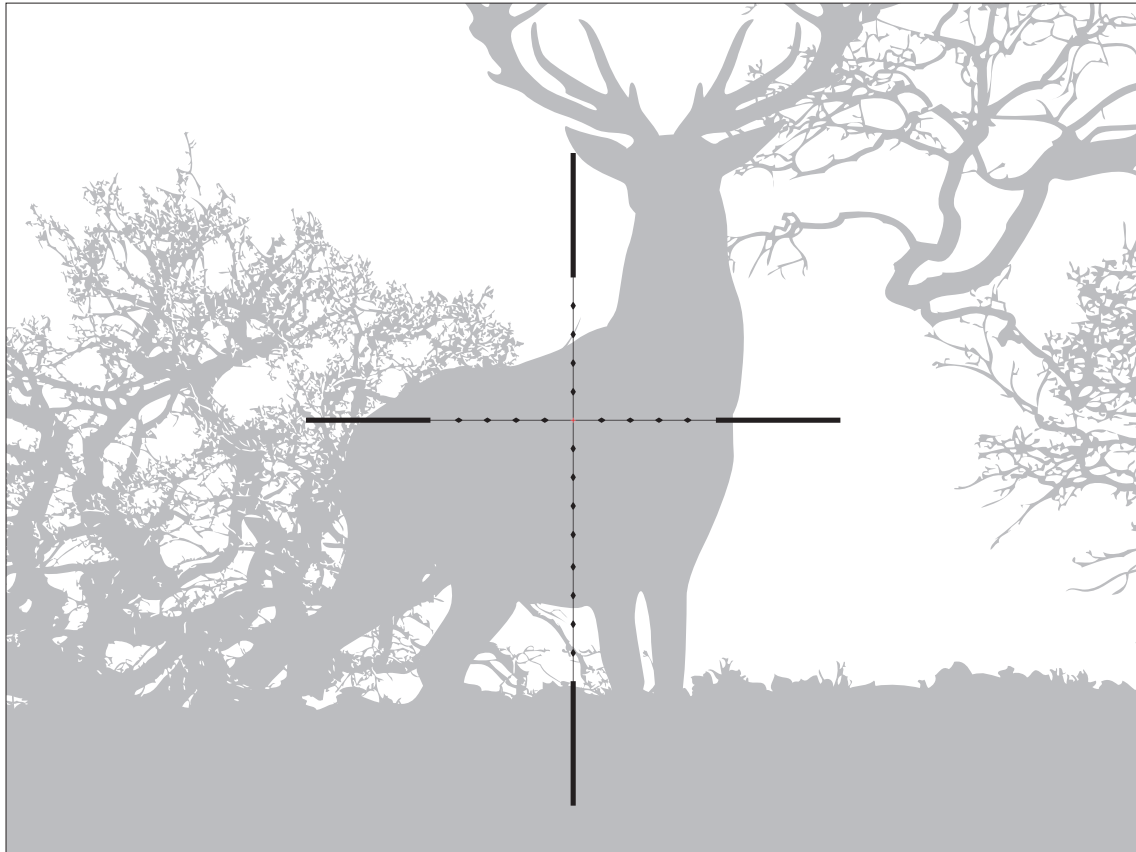

Reticle parameters (apply to all magnifications)

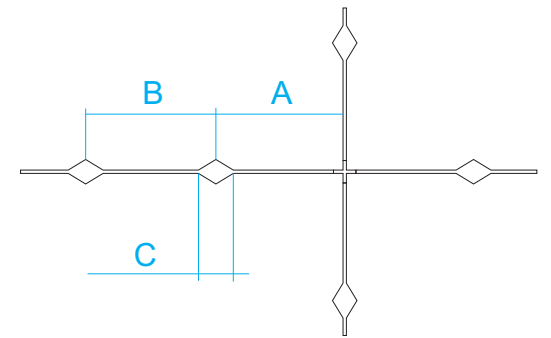

	MOA	cm @ 100 m
Section A	3.5	10 (1 mil)
Section B	3.5	10 (1 mil)
Section C	0.86	2.5 (0.25 mil)

Digital Night Vision Riflescopes

DIGEX N450 | N455

