




Reticle
Catalogue

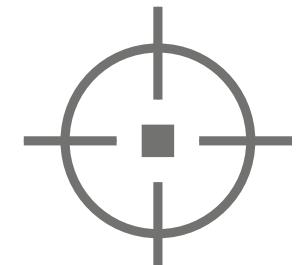

Thermal Imaging Riflescope

TALION XQ38



Non-scalable reticles

The values of the non-scalable reticles are correct in the following cases:

- when the magnification of the scope is set to minimum
- when "picture in picture" is activated



D50i



C50i



X54i



H50i



X50i



T54



M58i



X51Fi-300



M56Fi (Mil-Dot)




M57Fi (Mil-Dot)

Scalable reticles


Reticle parameters apply to all magnifications



D50i

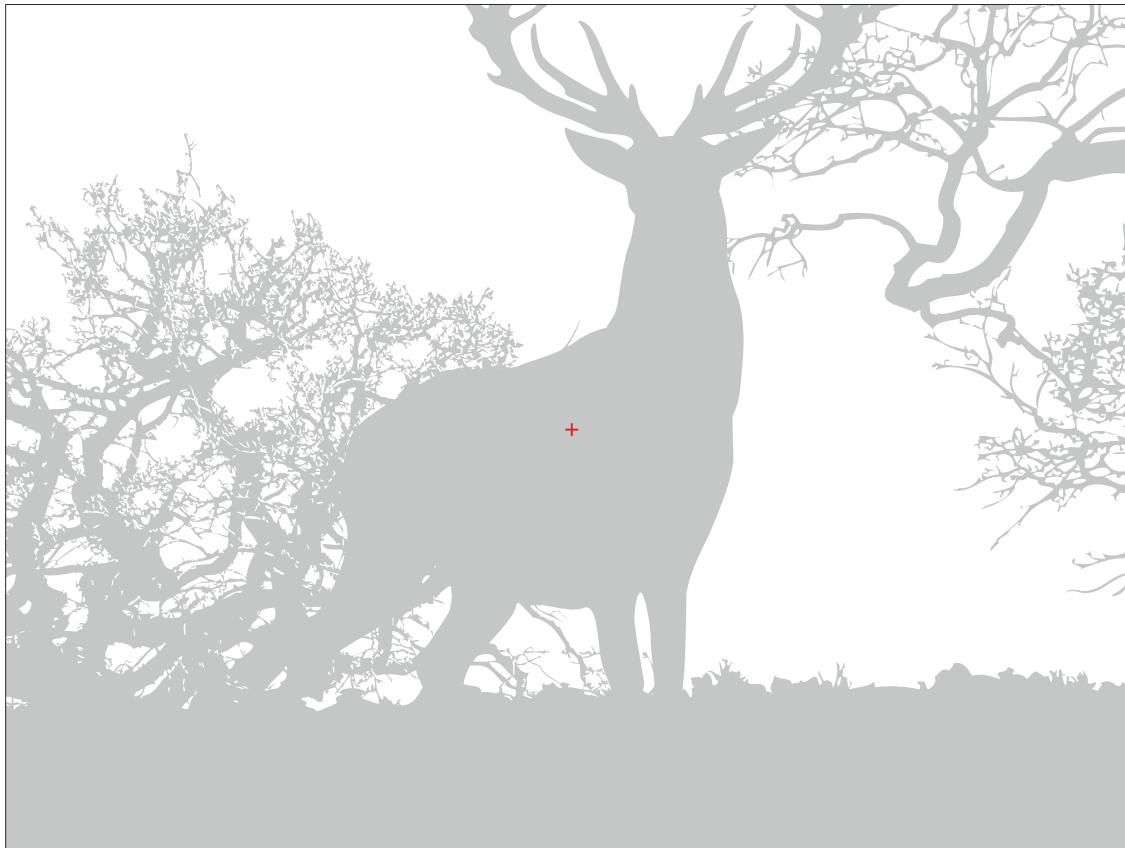

Reticle parameters
(apply to all magnifications)

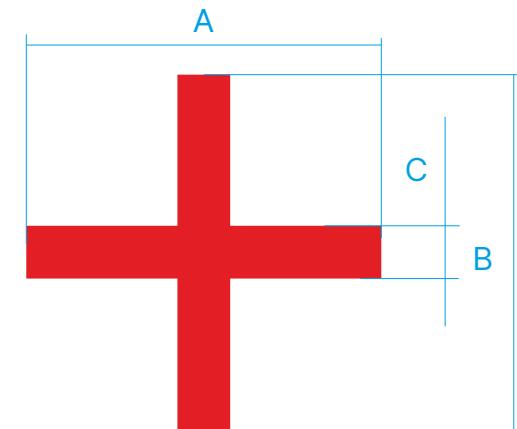


	MOA	cm @ 100 m
Section A	4.0	11.7
Section B	4.0	11.7
Section C	0.6	1.7

Thermal Imaging Riflescope
TALION XQ38


TO CONTENT



C50i

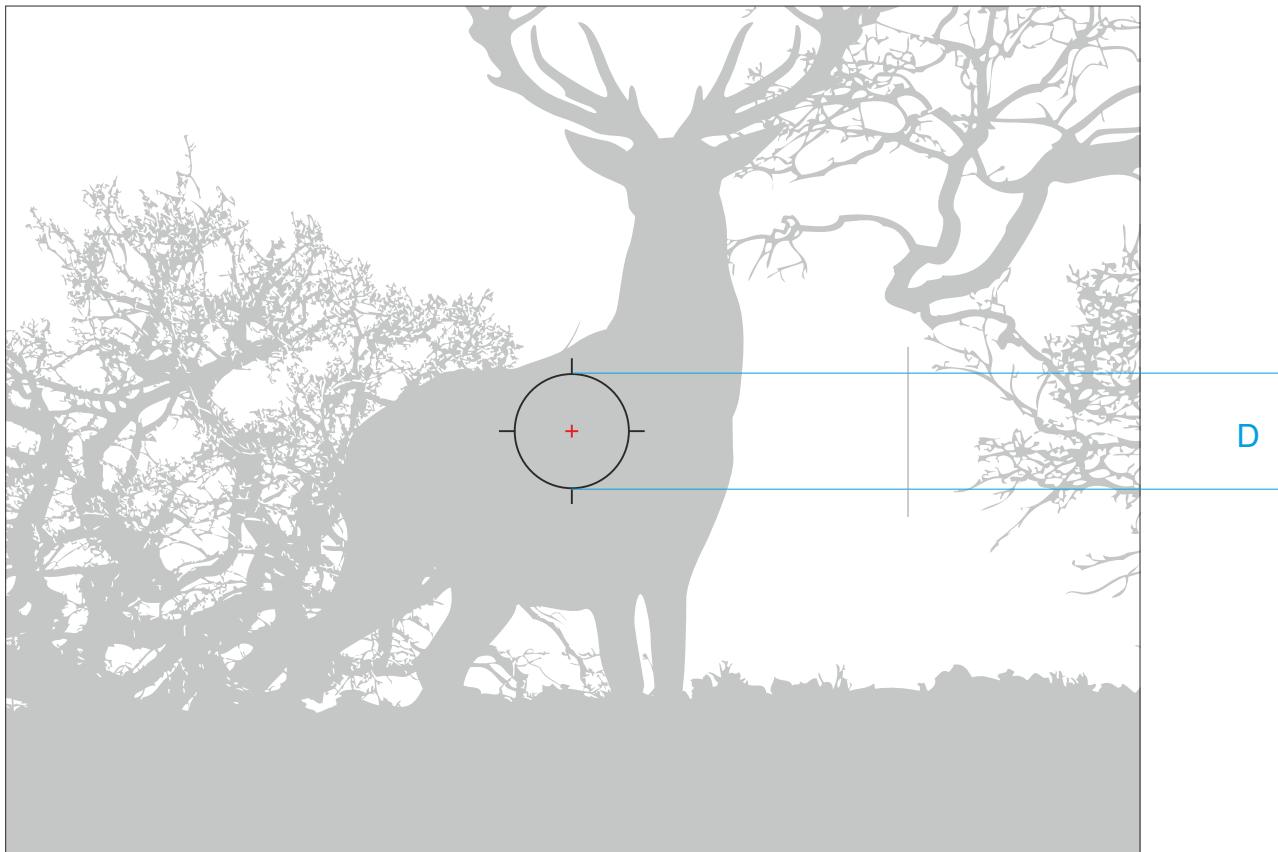

Reticle parameters
(apply to all magnifications)

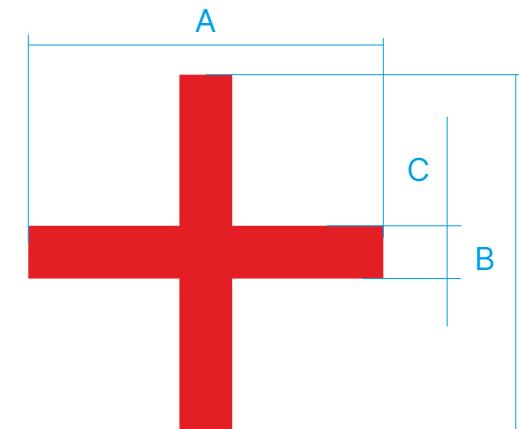

	MOA	cm @ 100 m
Section A	4.0	11.7
Section B	4.0	11.7
Section C	0.6	1.7
Section D	34.4	100


Thermal Imaging Riflescope

TALION XQ38


[TO CONTENT](#)

 **PULSAR**

X54i

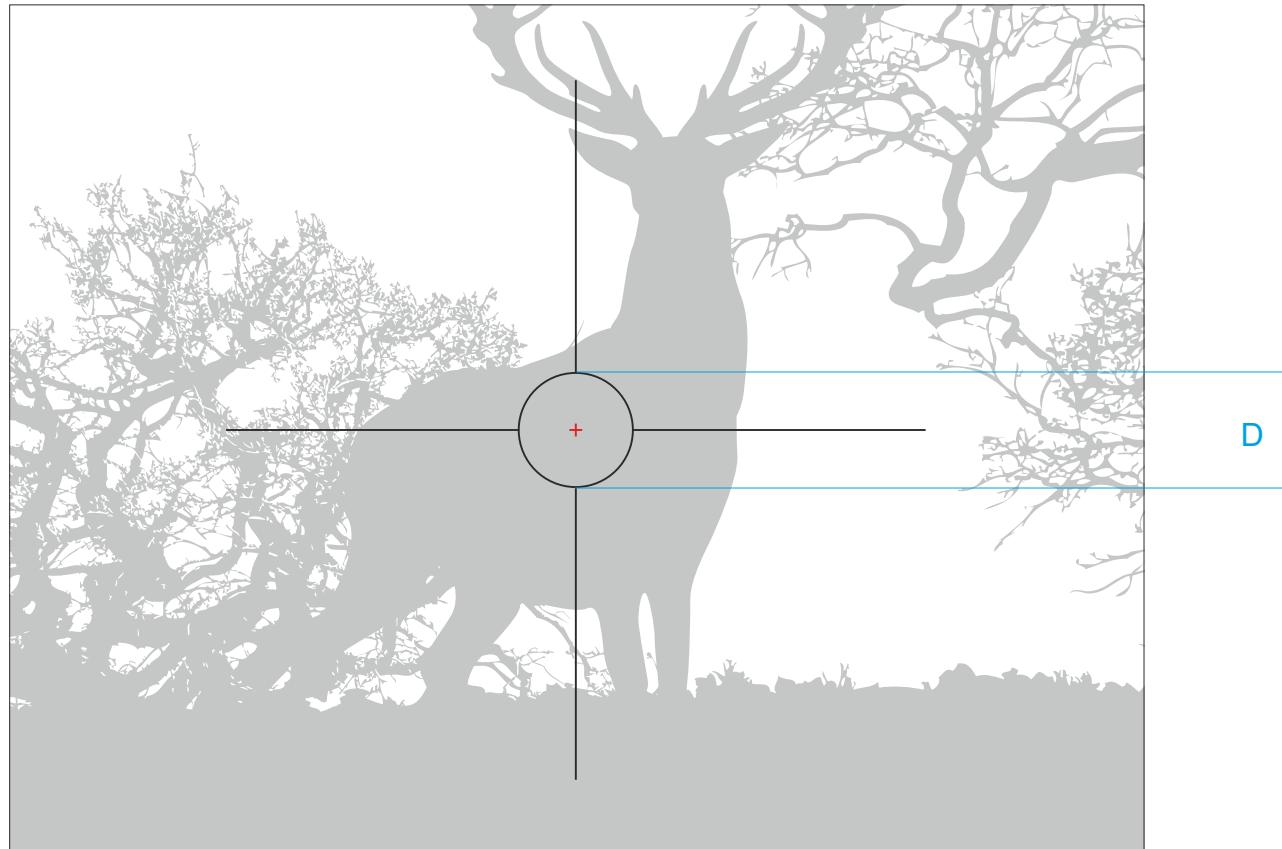

Reticle parameters
(apply to all magnifications)

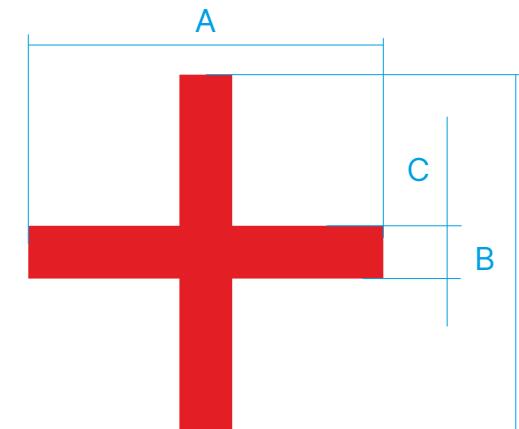


	MOA	cm @ 100 m
Section A	4.0	11.7
Section B	4.0	11.7
Section C	0.6	1.7
Section D	34.4	100

Thermal Imaging Riflescope
TALION XQ38


 **TO CONTENT**



H50i

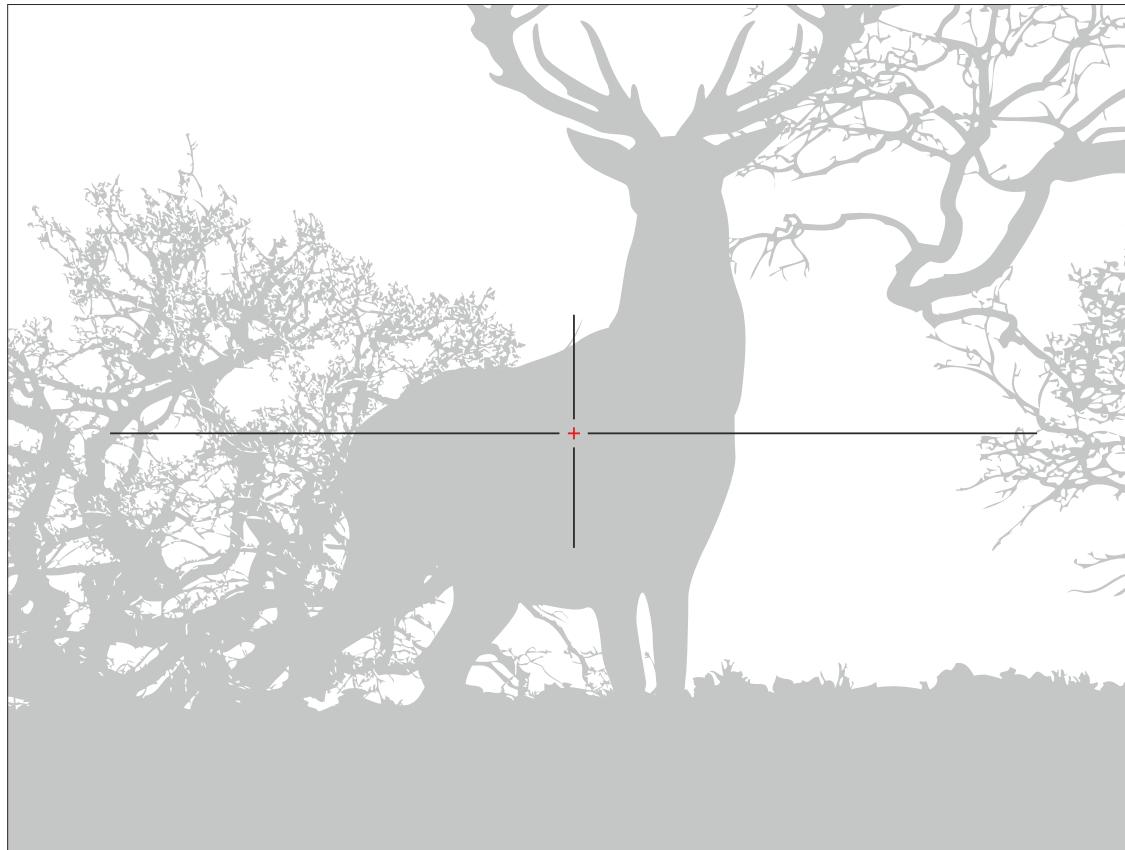

Reticle parameters
(apply to all magnifications)

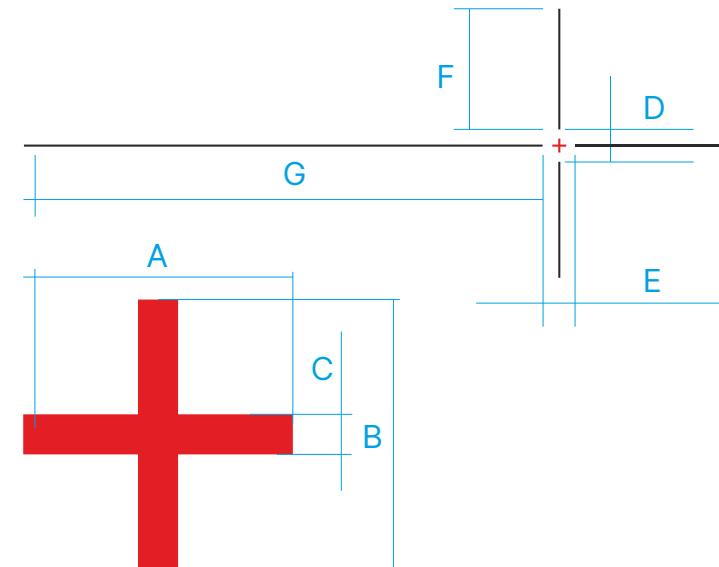

	MOA	cm @ 100 m
Section A	4.0	11.7
Section B	4.0	11.7
Section C	0.6	1.7
Section D	10	29
Section E	10	29
Section F	53	154
Section G	176.4	513


Thermal Imaging Riflescope

TALION XQ38

[TO CONTENT](#)




X50i

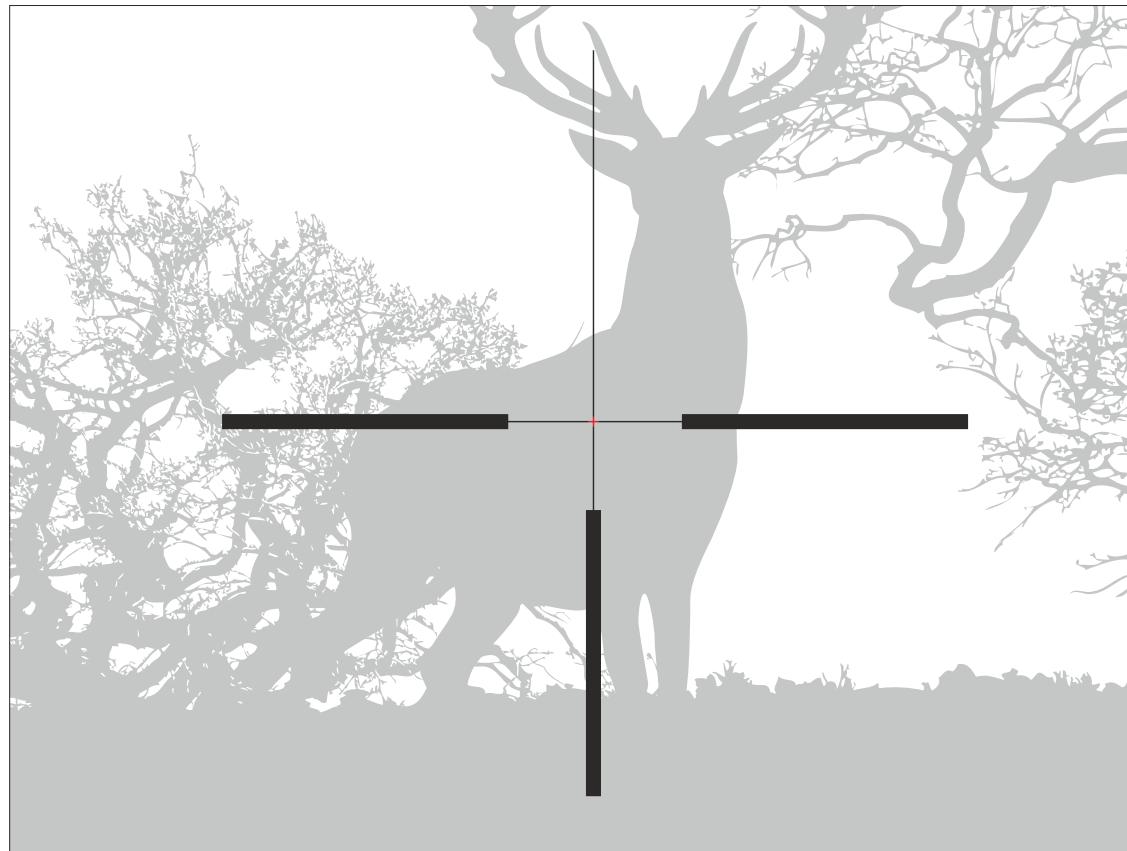

Thermal Imaging Riflescope
TALION XQ38

Reticle parameters
(apply to all magnifications)

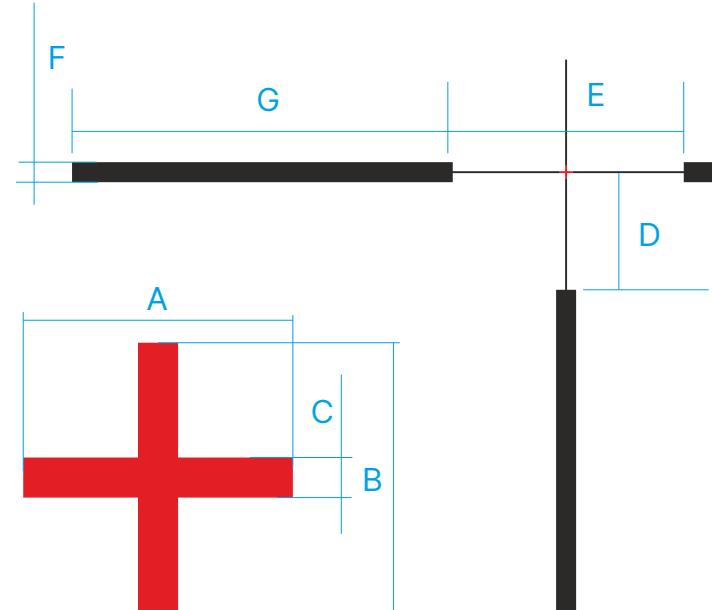


	MOA	cm @ 100 m
Section A	4.0	11.7
Section B	4.0	11.7
Section C	0.6	1.7
Section D	34.4	100
Section E	68.8	200
Section F	1.8	5.1
Section G	164	478


TO CONTENT



T54

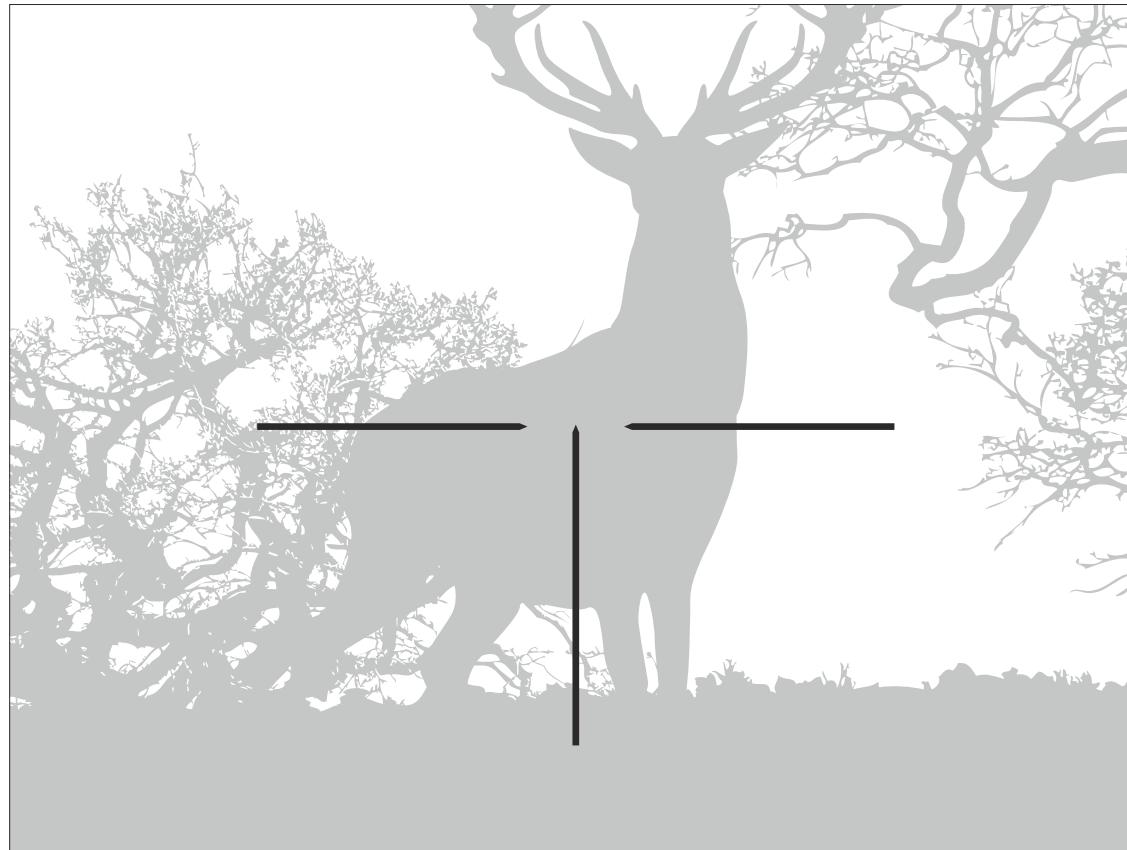

Reticle parameters
(apply to all magnifications)

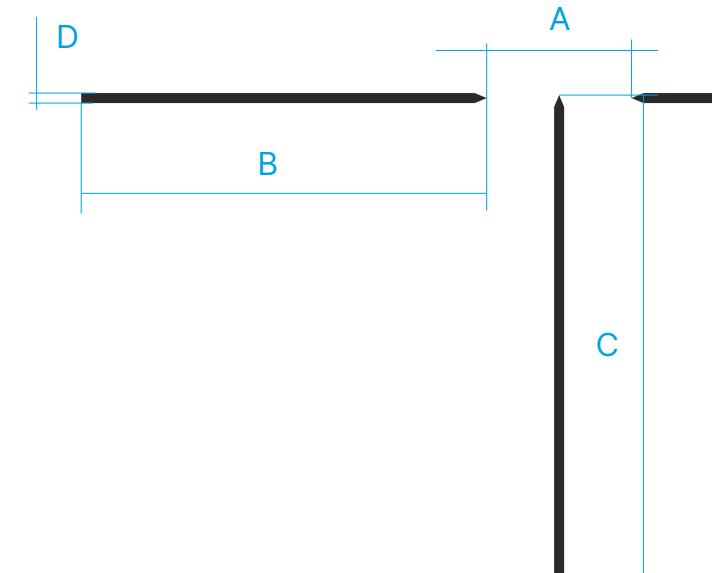

	MOA	cm @ 100 m
Section A	34.4	100
Section B	164	478
Section C	183	534
Section D	4.0	11.7


Thermal Imaging Riflescope

TALION XQ38

[TO CONTENT](#)




M58i

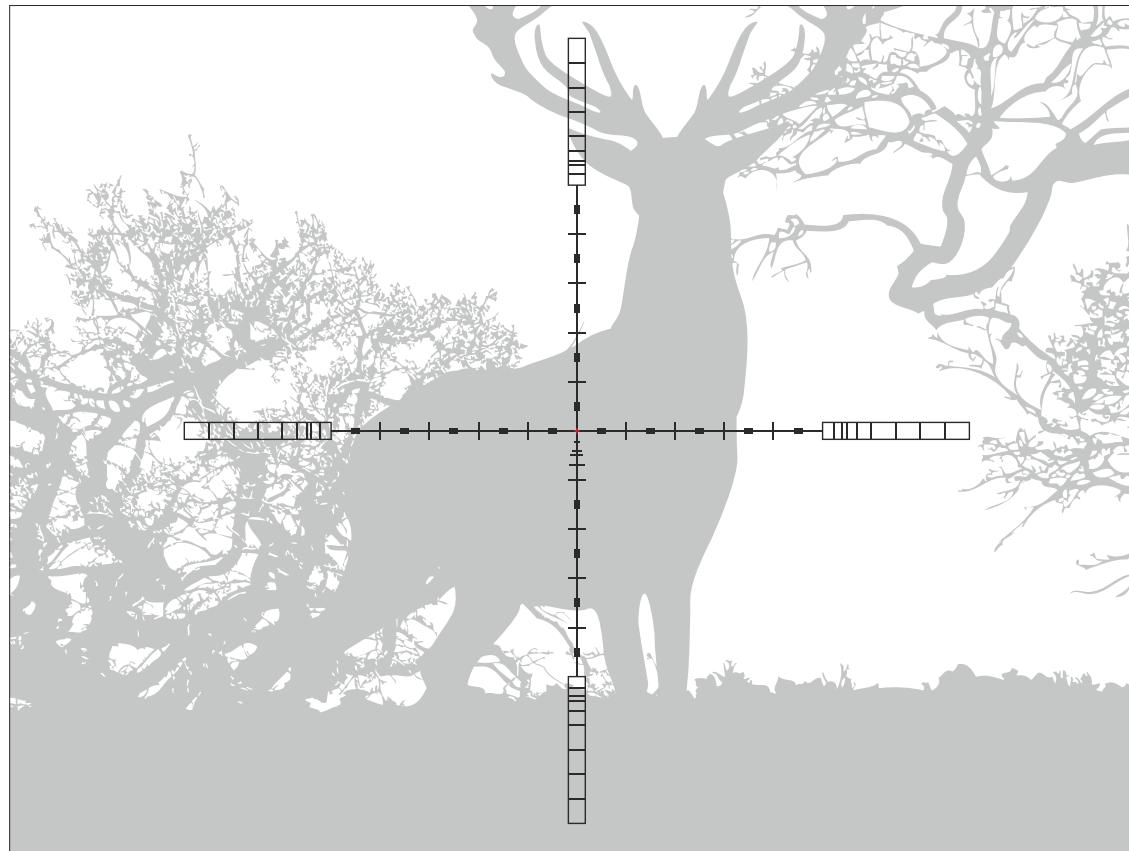

Thermal Imaging Riflescope
TALION XQ38

Reticle parameters
(apply to all magnifications)

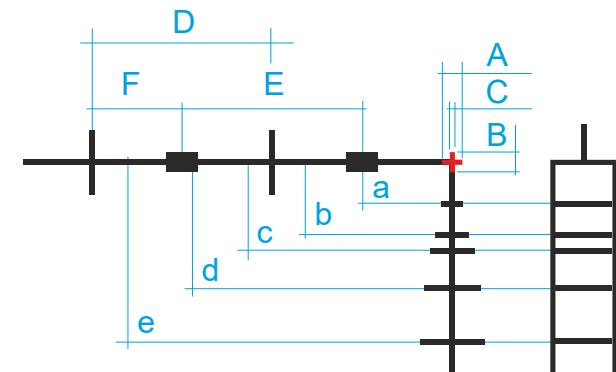

	MOA	cm @ 100 m
Section A	1.7	5 on 2.5 x magnification
Section B	1.7	5 on 2.5 x magnification
Section C	0.6	1.7 on 2.5 x magnification
Section D	3.5	10 (1 mil) on 10x magnification
Section E	3.5	10 (1 mil) on 10x magnification
Section F	3.5	10 (1 mil) on 5x magnification


Section a	1 mil (10 cm @ 100 m) on 2.5x magnification
Section b	1 mil (10 cm @ 100 m) on 4x magnification
Section c	1 mil (10 cm @ 100 m) on 5x magnification
Section d	1 mil (10 cm @ 100 m) on 7x magnification
Section e	1 mil (10 cm @ 100 m) on 10x magnification

TO CONTENT




X51 Fi-300

SCALABLE

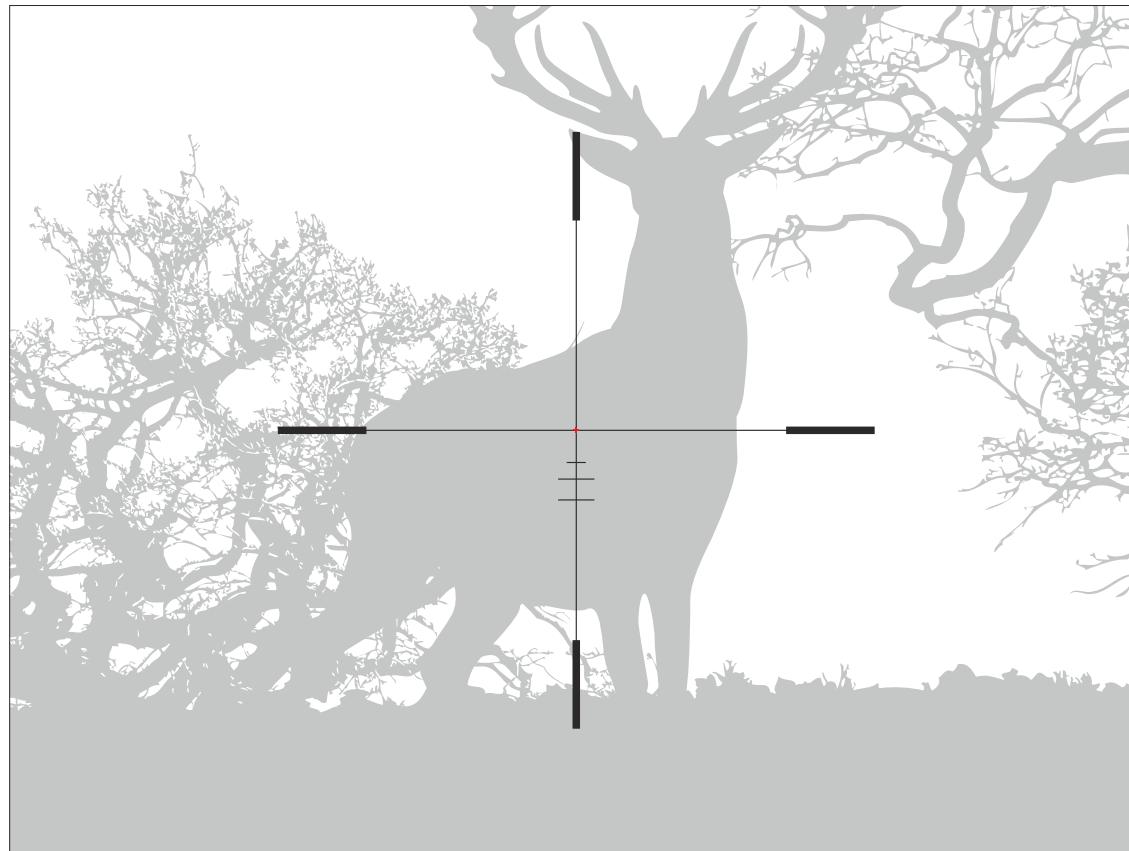

Reticle parameters
(apply to all magnifications)

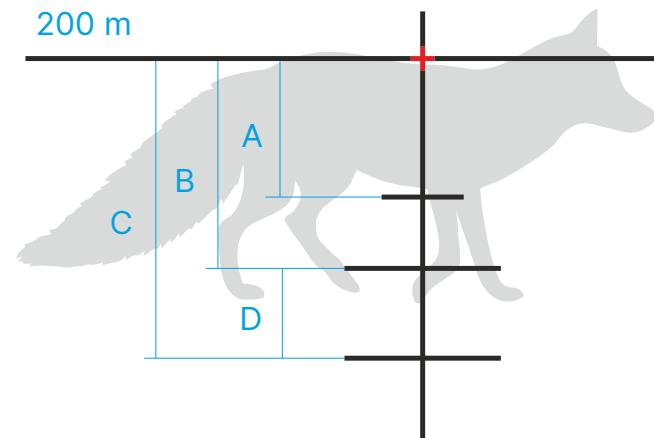

	200 m	300 m
Section A	15 cm (fox body)	23 cm (roe deer body)
Section B	23 cm (roe deer body)	35 cm (wild boar body)
Section C	35 cm (wild boar body)	50 cm (deer body)
Section D	—	15 cm (fox body)


Thermal Imaging Riflescope
TALION XQ38

TO CONTENT




M56Fi

SCALABLE

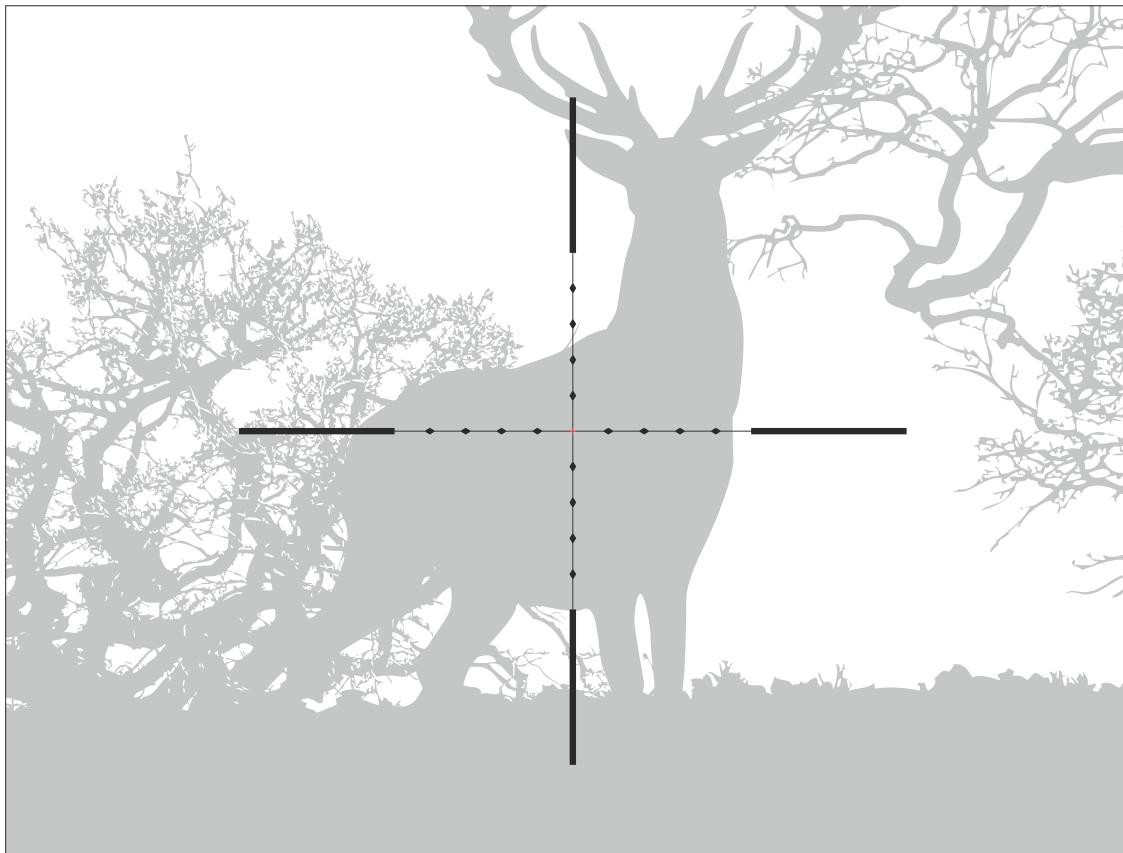

Reticle parameters
(apply to all magnifications)

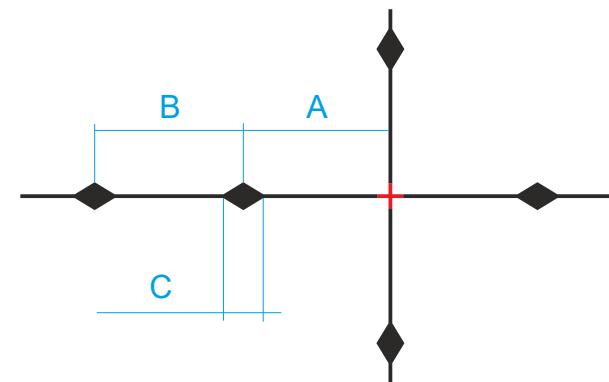

	MOA	CM @ 100 M
Section A	3.5	10 (1 MIL)
Section B	3.5	10 (1 MIL)
Section C	0.86	2.5 (0.25 MIL)


Thermal Imaging Riflescope
TALION XQ38

TO CONTENT




M57Fi

SCALABLE

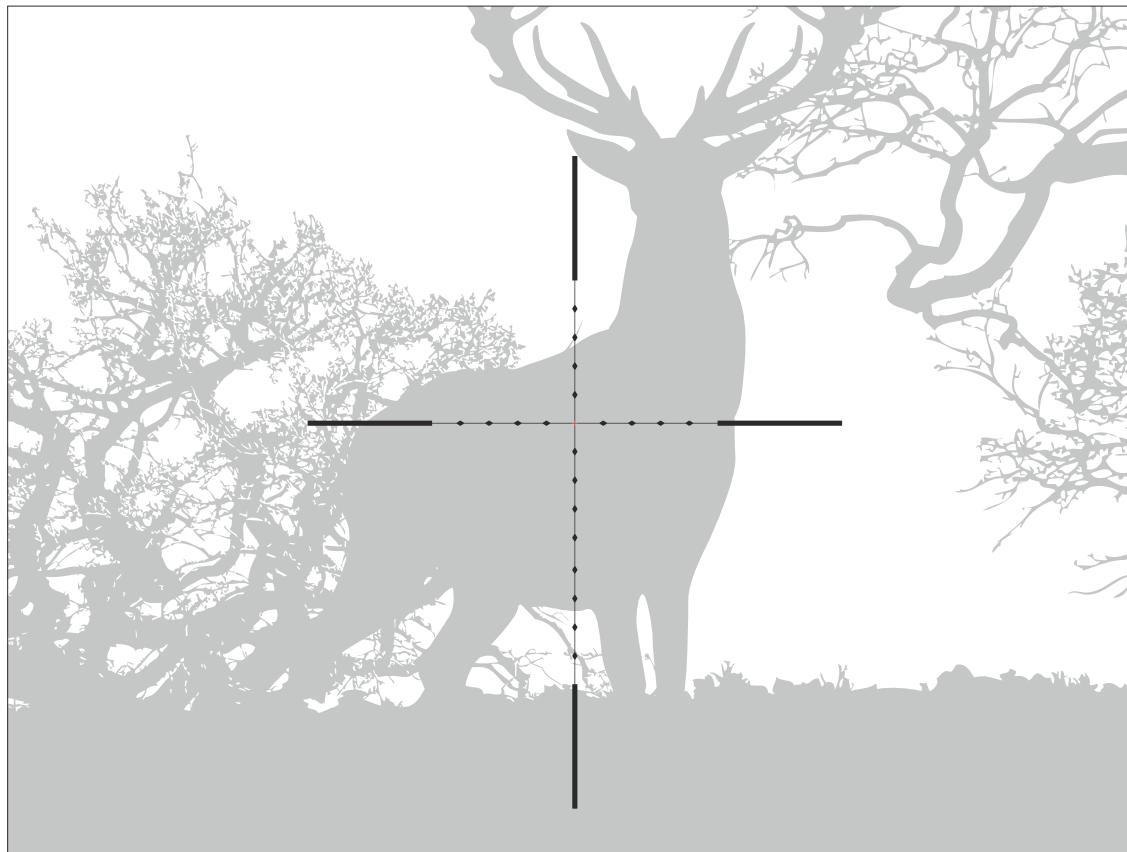

Reticle parameters
(apply to all magnifications)

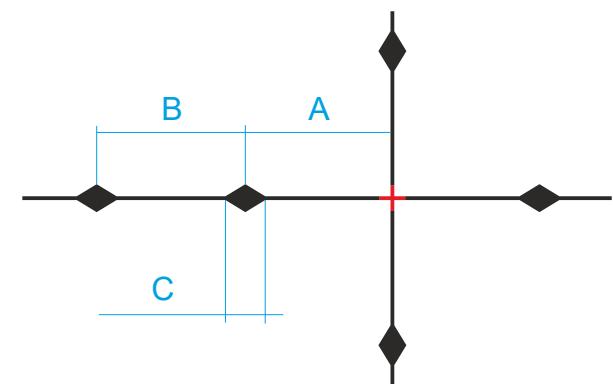

	MOA	CM @ 100 M
Section A	3.5	10 (1 MIL)
Section B	3.5	10 (1 MIL)
Section C	0.86	2.5 (0.25 MIL)

Thermal Imaging Riflescope
TALION XQ38

▲ TO CONTENT



www.pulsar-vision.com